ORDINANCE NO.: 05-19

AN ORDINANCE OF THE MAYOR AND COUNCIL OF THE BOROUGH OF MOUNT ARLINGTON, COUNTY OF MORRIS AND STATE OF NEW JERSEY, AUTHORIZING AND APPROPRIATING $22,800.00 FOR THE FIREMEN'S FIELD WALKING PATH

WHEREAS, the Mayor and Council for the Borough of Mount Arlington desires to complete the Firemen's Field Walking Path project; and

WHEREAS, the cost of said improvements is estimated to be $22,800.00; and

WHEREAS, in order to finance the expenditures associated with the Firemen's Field Walking Path Improvements, including but not limited to, all activities associated with the construction; the design and implementation of all necessary measures; and issuance of Request for Proposals the Borough Engineer has provided the estimated cost for the project. The Borough authorizes the appropriation and expenditure of $22,800.00 from the Capital Improvement Fund; and

WHEREAS, the Borough Engineer and the Borough Chief Financial Officer recommends the Mayor and Council for the Borough of Mount Arlington authorize the appropriation.

BE IT ORDAINED, by the Mayor and Council of the Borough of Mount Arlington, County of Morris and State of New Jersey as follows:

Section 1: The improvement and purpose described in Section 3 of this ordinance is hereby authorized as a general improvement to be made or acquired by the Borough of Mount Arlington, County of Morris, New Jersey (hereinafter referred to as the "Borough"). For the said improvement or purpose stated in Section 3 of this ordinance, there is hereby appropriated $22,800.00, said sum being inclusive of all appropriations heretofore made therefor.

Section 2: The improvement hereby authorized and the purpose for the financing of which said obligations are to be issued is as follows:

The completion of the Firemen's Field Walking Path, including but not limited to, all activities associated with the construction; the design and implementation of all necessary measures; and issuance of Request for Proposals. For the said improvement or purpose stated in this Section, there is appropriated $22,800.00 from the Capital Improvement Fund.

Section 3: The improvement authorized is expenditures associated with the completion of the Firemen's Field Walking Path Project, including but not limited to, all activities associated with construction costs; the design and implementation of all necessary measures; and Request for Proposals.

The following additional matters are hereby determined, declared, recited and stated:

(a) The purpose described in Section 2 of this ordinance is not a current expense and is property or an improvement which the Borough may lawfully acquire or make as a general improvement having a period of usefulness of at least five (5) years and no part of the cost thereof has been or shall be specially assessed on property benefitted thereby.

(b) Amount not exceeding $3,800.00 in the aggregate for interest on said obligations, costs of issuing said obligations, engineering costs, legal fees and other items of expense listed and permitted under N.J.S.A. 40A:2-20 of the Law may be included as part of the costs of said improvement and are included in the foregoing estimates thereof.

Section 4: Any grant or other moneys received for the purposes described in Section 3 hereof in addition to the funds expressly appropriated in Section 2 hereof, shall be applied to direct payment of the cost of the improvement.

Section 5: The Capital Budget of the Borough is hereby amended to conform with the provisions of this Ordinance to the extent of any inconsistency herewith. The resolution in the form promulgated by the Local Finance Board of the New Jersey Department of Community Affairs showing full detail of the amended capital budget and capital program as approved by the Director of the Division of Local Government Services, is on file with the Borough Clerk and is available for public inspection.

Section 6: The provisions of this Ordinance are severable. To the extent any clause, phrase, sentence, paragraph or provision of this Ordinance shall be declared invalid, illegal, or unconstitutional, the remaining provisions shall continue in full force and effect.

Section 7: To the extent that any previous Ordinance or resolutions inconsistent with or contradictory hereto, said Ordinance or resolution is hereby repealed or amended to the extent necessary to make it consistent herewith.

Section 8: This ordinance shall take effect after final adoption and publication in the manner provided by law.

I HEREBY CERTIFY this to be a true and correct Ordinance of the Mayor and Council of the Borough of Mount Arlington, introduced on January 15, 2019; and will be further considered after a public hearing held on February 5, 2019 at the Municipal Building at 7:00 p.m.

Attest:

BOROUGH OF MOUNT ARLINGTON

Linda DeSantis, RMC, Borough Clerk

Michael Stanzilis, Mayor
Borough of Mount Arlington

CP PROFESSIONAL SERVICES

FIREMAN'S FIELD WALKING PATH
ENGINEER'S OPINION OF PROBABLE COST

12/6/18

ITEM #	SEC. #	DESCRIPTION	UNIT	UNIT COST	FIREMAN'S FIELD	IF AND WHERE DIRECTED	BID QUANTITY	TOTAL COST
1	154	MOBILIZATION	LS	$2,000.00	1	0	1	**$2,000.00**
2	161	FINAL CLEANUP	LS	$1,600.00	1	0	1	**$1,600.00**
3	201	CLEARING SITE	LS	$2,600.00	1	0	1	**$2,600.00**
4	302	DENSE-GRADED AGGREGATE, 6" THICK	SY	$8.50	445	70	515	**$4,377.50**
5	601	12" HIGH DENSITY POLYETHYLENE PIPE	LF	$10.00	8	2	10	**$100.00**
6	605	CHAIN LINK FENCE, 6' HIGH	LS	$4,000.00	1	0	1	**$4,000.00**
7	804	TOPSOILING, 4" THICK	SY	$9.00	211	34	245	**$2,205.00**
8	806	FERTILIZING, SEEDING, AND MULCHING, TYPE "1"	SY	$4.00	211	34	245	**$980.00**

CONSTRUCTION COST SUBTOTAL:	**$17,862.50**
25% CONTINGENCY:	$4,465.63
TOTAL BUDGETARY ESTIMATE	**$22,328.13**

John Cahillane, NJEIT Lic. No. 1116-EIT-03026 — Date 12/6/18

David A. Clark, NJPE Lic. No. 24GE03980500 — Date 12/6/18

35 Sparta Avenue
Sparta, New Jersey 07871
Phone (973) 300-9003
Fax (973) 300-4003
www.cppsc.com

MEMORANDUM

TO: Stan Puszcz, P.E., Managing Partner **PROJ:** 576C015

FROM: John Cahillane, Project Engineer

DATE: December 6, 2018

SUBJECT: Fireman's Field Walking Path Scope of Work

These Request for Proposal (RFP) documents, including, Scope of Work and Drawing(s) provide the requirements for the installation of a dense-graded aggregate (DGA) walking path as well as associated fence construction and drainage pipe installation at Fireman's Field in the Borough of Mount Arlington.

Scope of Work

Construction of the walking path shall be in accordance with the items of work as described below. The contractor shall provide a price for each of the items of work described below and on the attached form.

Construction of Walking Path – Work under this item shall consist of the clearing and grubbing necessary to provide a stable and compacted area for the installation of the walking path. The walking path shall be four (4) feet wide and consist of six (6) inches of DGA that has been compacted to increase the strength of the path and to reduce erosion potential. These DGA paths will be connected to existing sidewalk and asphalt paths in order to form two loops throughout the project site. The inner loop will be a length of 0.27 miles and the outer loop will be a length of 0.29 miles.

Construction of Drainage Pipe – Work under this item shall consist of the placement of the twelve (12) inch diameter high density polyethylene (HDPE) pipe within the existing swale on the northern side of the property in such a manner that the walking path can be constructed above the pipe, while the pipe maintains the ability of the swale to flow without obstruction from the newly constructed walking path.

Construction of Fencing – Work under this item shall consist of the removal, relocation, reconstruction, and construction of six (6) foot high chain link fence at the Fireman's Field property. In the northeast corner of the property, the fence shall be relocated (and new fence shall be constructed where necessary) to create an overlapping section of fence which will allow the walking path to transition from outside of the fence to inside the fence. Additionally, two different types of chain link fence exist on site and meet behind the batting cage on the eastern side of the property. In order for the walking path to pass through as shown (east side of the batting cage), sections of each type of fence must be removed to eliminate the pinch point between the fence and batting cage. The section(s) of gray chain link fence shall be relocated/reconstructed to meet with the green fence at the post further from the batting cage and the panel of green chain link fence that is perpendicular to the path of the walking path shall be removed or shortened.

m:\clients\mount arlington\civil projects\576c015_firemans field walking path\documents\2018-12-06 scoping document.docx

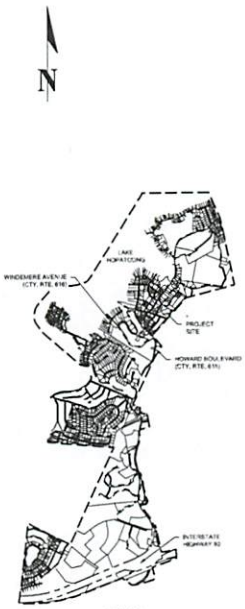

KEY MAP
SCALE: 1" = 2,000'

LEGEND

EXISTING WALKING PATH 510 LF

PROPOSED WALKING PATH 1,000 LF

WALKING PATH LENGTHS
OUTER LOOP: 0.29 MILES (1,552 FT)
INNER LOOP: 0.27 MILES (1442.7 FT)

SITE PLAN

40 0 40 80 120

SCALE: 1" = 40'



FENCE TRANSITION PLAN

10 0 10 20 30

SCALE: 1" = 10'



FENCE RELOCATION PLAN

10 0 10 20 30

SCALE: 1" = 10'

No.	DATE	DESCRIPTION	BY	CKD.

LETTER REVISIONS ARE NOT TO BE USED FOR CONSTRUCTION

DESIGN J.M.C.
DRAWN J.M.C.
CHECKED S.G.P.

CP PROFESSIONAL SERVICES

CP ENGINEERS LLC. CP ENGINEERS NY, LLC.
COA: 24GA28209900 COA: 24GA28254400
3A SPARTA AVE - SPARTA, N.J. 07871
(973) 700-9007 - FAX: (973) 700-4007

WALKING PATH LAYOUT

FIREMAN'S FIELD WALKING PATH
MOUNT ARLINGTON / BLOCK 31, LOT 2
MORRIS COUNTY, NEW JERSEY

JOB No.: 576C015
DATE: 12-06-18
SHEET C-001